



Computer Systems and Networks

ECPE 170 – Jeff Shafer – University of the Pacific

MIPS Assembly (Functions)

Lab Schedule

Activities

➤ This Week

- Lab work time
- MIPS functions
- MIPS Random Number Generator

Assignments Due

➤ Lab 10

➤ Due by Apr 14th 5:00am

➤ Lab 11

➤ Due by Apr 23rd 5:00am

➤ Lab 12

➤ Due by May 1st 5:00am

FP Regs Int Regs [16] Data Text

| Int Regs [16] | |
|---------------|------------|
| PC | = 0 |
| EPC | = 0 |
| Cause | = 0 |
| BadVAddr | = 0 |
| Status | = 3000ff10 |
| HI | = 0 |
| LO | = 0 |
| R0 [r0] | = 0 |
| R1 [at] | = 0 |
| R2 [v0] | = 0 |
| R3 [v1] | = 0 |
| R4 [a0] | = 0 |
| R5 [a1] | = 0 |
| R6 [a2] | = 7ffff4e4 |
| R7 [a3] | = 0 |
| R8 [t0] | = 0 |
| R9 [t1] | = 0 |
| R10 [t2] | = 0 |
| R11 [t3] | = 0 |
| R12 [t4] | = 0 |
| R13 [t5] | = 0 |
| R14 [t6] | = 0 |
| R15 [t7] | = 0 |
| R16 [s0] | = 0 |
| R17 [s1] | = 0 |
| R18 [s2] | = 0 |
| R19 [s3] | = 0 |
| R20 [s4] | = 0 |
| R21 [s5] | = 0 |
| R22 [s6] | = 0 |
| R23 [s7] | = 0 |
| R24 [t8] | = 0 |
| R25 [t9] | = 0 |
| R26 [k0] | = 0 |
| R27 [k1] | = 0 |

```

User Text Segment [00400000]..[00440000]
; 183: lw $a0 0($sp) # argc
[00400000] 8fa4 0000    lw $4, 0($29)
[00400004] 27a5 0004    addiu $5, $29,
[00400008] 24a6 0004    addiu $6, $5, 4
[0040000c] 0004 0080    sll $2, $4, 2
[00400010] 00c2 0021    addu $6, $6, $2
[00400014] 0c00 0000    jal 0x00000000
[00400018] 0000 0000
[0040001c] 3402000a    ori $2, $0, 10
[00400020] 0000000c    syscall

Kernel Text
[80000180] 0001d821    addu $27, $0, $27
[80000184] 3c019000    lui $1, -28672
trust $sp
[80000188] ac220200    sw $2, 512($1)
[8000018c] 3c019000    lui $1, -28672
registers
[80000190] ac240204    sw $4, 516($1)
[80000194] 401a6800    mfc0 $26, $13
[80000198] 001a2082    srl $4, $26, 2
[8000019c] 3084001f    andi $4, $4, 31
[800001a0] 34020004    ori $2, $0, 4
[800001a4] 3c049000    lui $4, -28672 [_ml_]
[800001a8] 0000000c    syscall
[800001ac] 34020001    ori $2, $0, 1
[800001b0] 001a2082    srl $4, $26, 2
[800001b4] 3084001f    andi $4, $4, 31
[800001b8] 0000000c    syscall
[800001bc] 34020004    ori $2, $0, 4
[800001c0] 3344003c    andi $4, $26, 60
[800001c4] 3c019000    lui $1, -28672
[800001c8] 00240821    addu $1, $1, $4
[800001cc] 8c240180    lw $4, 384($1)
[800001d0] 00000000    nop
[800001d4] 0000000c    syscall
[800001d8] 34010018    ori $1, $0, 24
; 113: bne $k0 0x18 ok_pc # Bad PC exception

```

Single Step Button!

(Advance by 1 instruction)

MIPS Functions



Function Requirements?

↗ What happens when we call a function?

1. Place function arguments in standard location where function can find them
2. Save current program location to return to later (the “Program Counter” register)
3. Jump to the function location
4. Function runs using provided arguments
5. Function produces output (return value) and saves it in standard location
6. Jump to original program location (return)
 1. *Technically, +1 instruction*

Function Requirements

- ↗ **Can a function change local variables of its calling function?**
- ↗ No! The function operates in its own “bubble”
- ↗ **What happens if the function changes \$s0 which was also used by the calling function?**
- ↗ Problem! Your function has corrupted the calling function

Functions in Assembly

In assembly, **you** must do all the background work for functions that the compiler did automatically in a higher level language

Functions still allow for **code re-use** (good!), but they're more complicated than in C or C++

Registers

| Name | Use |
|-----------|--|
| \$zero | Constant value: ZERO |
| \$s0-\$s7 | Local variables (Convention: These are <i>saved</i> if a function needs to re-use them) |
| \$t0-\$t9 | Temporary results (Convention: These are <i>not saved</i> if a function needs to re-use them) |
| \$a0-\$a3 | Arguments to pass to function (max of 4) |
| \$v0-\$v1 | Return value to obtain from function (max of 2) |
| \$ra | Return address of function |
| \$sp | Stack pointer (current top of stack) |

New!

More Jumps

↗ Jump and Link

(side effect: \$ra stores address of next instruction)

```
jal <destination>
```

Use this to *call* a function!

↗ Jump Register

(destination address is stored in <reg1>)

```
jr <reg1>
```

Use this to *return from* a function!

Task : Write Code

```
#include <stdio.h>

int function(int a);

int main()
{
    int x=5;
    int y;

    y = function(x);

    printf("y=%i\n", y);

    return 0;
}

int function(int a)
{
    return 3*a+5;
}
```

- ↗ Place arguments in \$a0-\$a3
- ↗ Place return values in \$v0-\$v1
- ↗ Return address saved automatically in \$ra
- ↗ Ignore the stack for this example. (Thus, the function will destroy registers used by calling function)

```

# Simple routine to demo functions
# NOT using a stack in this example.
# Thus, the function does not preserve values
# of calling function!

# -----
.text
.globl main
main:
    # Register assignments
    # $s0 = x
    # $s1 = y

    # Initialize registers
    lw    $s0, x      # Reg $s0 = x
    lw    $s1, y      # Reg $s1 = y

    # Call function
    move $a0, $s0      # Argument 1: x ($s0)
    jal   fun          # Save current PC in $ra, and jump to fun
    move $s1,$v0        # Return value saved in $v0. This is y ($s1)

    # Print msg1
    li    $v0, 4        # print_string syscall code = 4
    la    $a0, msg1
    syscall

    # Print result (y)
    li    $v0,1        # print_int syscall code = 1
    move $a0, $s1        # Load integer to print in $a0
    syscall

    # Print newline
    li    $v0,4        # print_string syscall code = 4
    la    $a0, lf
    syscall

    # Exit
    li    $v0,10       # exit
    syscall

```

```

# -----
# FUNCTION: int fun(int a)
# Arguments are stored in $a0
# Return value is stored in $v0
# Return address is stored in $ra (put there by jal instruction)
# Typical function operation is:

fun:   # Do the function math
    li $s0, 3
    mul $s1,$s0,$a0      # s1 = 3*$a0  (i.e. 3*a)
    addi $s1,$s1,5        # 3*a+5

    # Save the return value in $v0
    move $v0,$s1

    # Return from function
    jr $ra                # Jump to addr stored in $ra

# -----
# Start .data segment (data!)
.data
x:    .word 5
y:    .word 0
msg1: .asciiz "y="
lf:   .asciiz      "\n"

```

Preserving Registers

- ↗ What if we don't want to destroy registers used by the calling function?
- ↗ Need to save those registers somewhere while our function runs (like memory!)
- ↗ A stack is a good structure for this

The Stack

- ↗ Stack is a data structure stored in memory
- ↗ \$sp (“Stack Pointer”) points to top of stack
 - ↗ But stack grows down in memory!
- ↗ Example
 - ↗ Push 4 to stack
 - ↗ Push 5 to stack
 - ↗ Pop (5 from stack)
 - ↗ Pop (4 from stack)


\$sp →

Memory




The Stack

- ↗ Stack is a data structure stored in memory
- ↗ \$sp (“Stack Pointer”) points to top of stack
 - ↗ But stack grows down in memory!
- ↗ Example
 - ↗ Push 4 to stack
 - ↗ Push 5 to stack
 - ↗ Pop (5 from stack)
 - ↗ Pop (4 from stack)

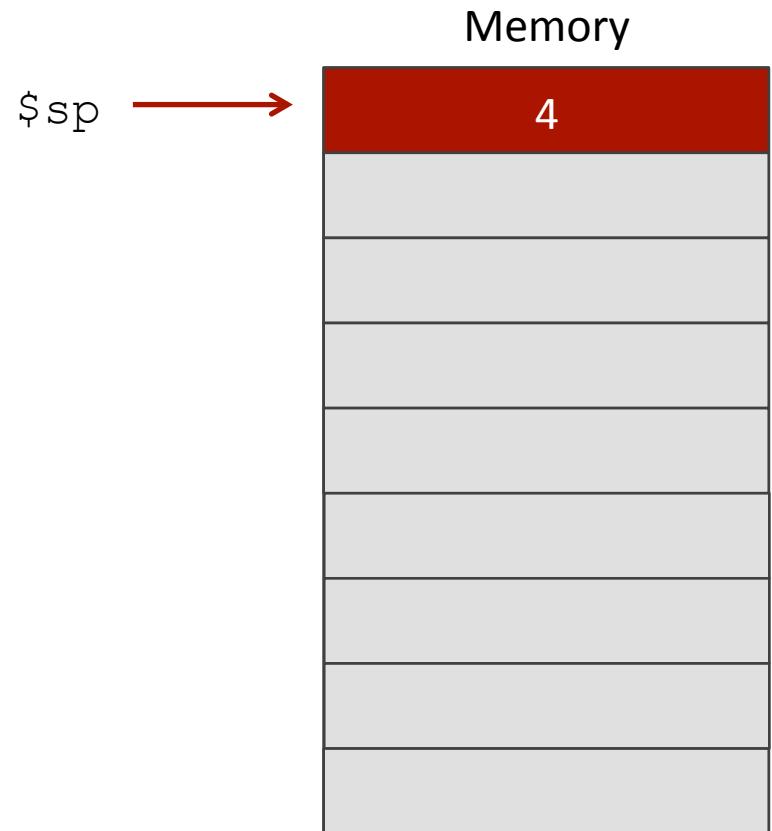


The Stack

- ↗ Stack is a data structure stored in memory
- ↗ \$sp (“Stack Pointer”) points to top of stack
 - ↗ But stack grows down in memory!
- ↗ Example
 - ↗ Push 4 to stack
 - ↗ Push 5 to stack
 - ↗ Pop (5 from stack)
 - ↗ Pop (4 from stack)

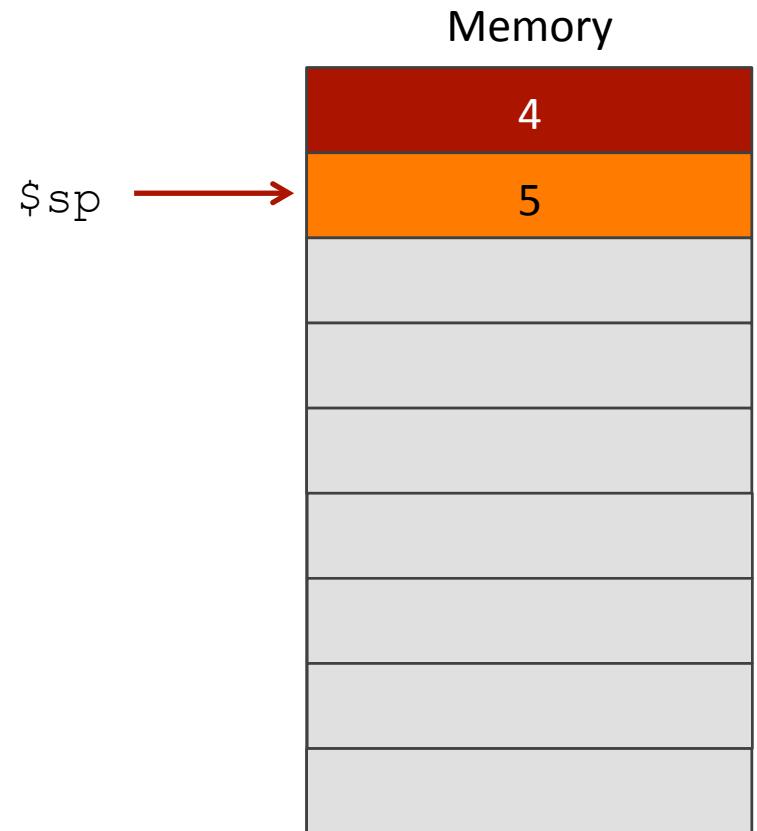

The Stack

- ↗ Stack is a data structure stored in memory
- ↗ \$sp (“Stack Pointer”) points to top of stack
 - ↗ But stack grows down in memory!
- ↗ Example
 - ↗ Push 4 to stack
 - ↗ Push 5 to stack
 - ↗ Pop (5 from stack)
 - ↗ Pop (4 from stack)

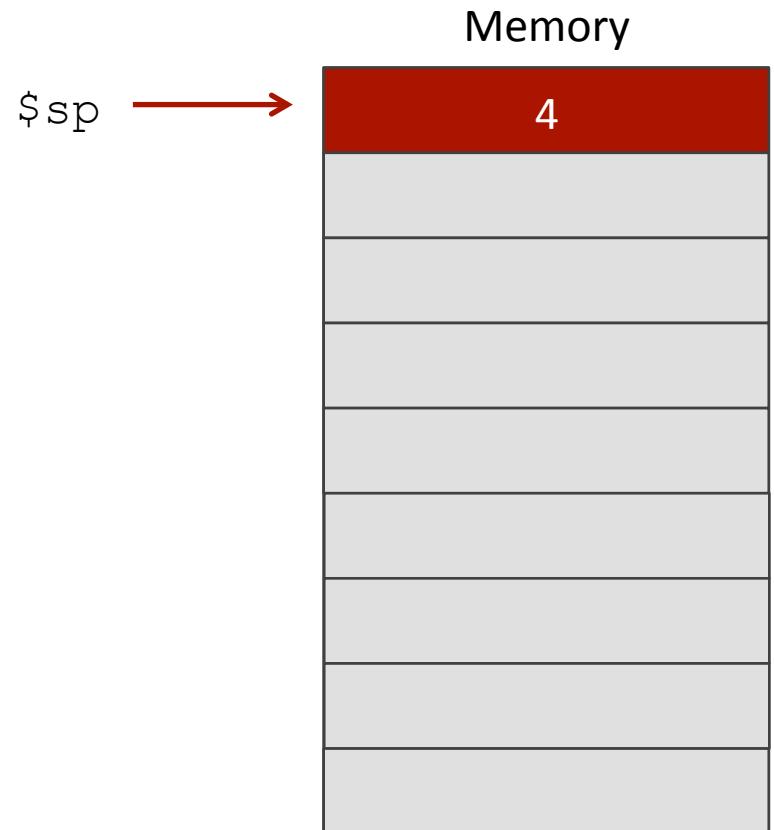

The Stack

- ↗ Stack is a data structure stored in memory
- ↗ \$sp (“Stack Pointer”) points to top of stack
 - ↗ But stack grows down in memory!
- ↗ Example
 - ↗ Add 4 to stack
 - ↗ Add 5 to stack
 - ↗ Pop
 - ↗ Pop

\$sp →

Memory



The Stack

- ↗ How would we modify previous solution to use a stack?

```

# Simple routine to demo functions
# NOT using a stack in this example.
# Thus, the function does not preserve values
# of calling function!

# -----
.text
.globl main
main:
    # Register assignments
    # $s0 = x
    # $s1 = y

    # Initialize registers
    lw    $s0, x      # Reg $s0 = x
    lw    $s1, y      # Reg $s1 = y

    # Call function
    move $a0, $s0      # Argument 1: x ($s0)
    jal   fun          # Save current PC in $ra, and jump to fun
    move $s1,$v0        # Return value saved in $v0. This is y ($s1)

    # Print msg1
    li    $v0, 4        # print_string syscall code = 4
    la    $a0, msg1
    syscall

    # Print result (y)
    li    $v0,1        # print_int syscall code = 1
    move $a0, $s1        # Load integer to print in $a0
    syscall

    # Print newline
    li    $v0,4        # print_string syscall code = 4
    la    $a0, lf
    syscall

    # Exit
    li    $v0,10       # exit
    syscall

```

```

# -----
# FUNCTION: int fun(int a)
# Arguments are stored in $a0
# Return value is stored in $v0
# Return address is stored in $ra (put there by jal instruction)
# Typical function operation is:

fun: # This function overwrites $s0 and $s1
    # We should save those on the stack
    # This is PUSH'ing onto the stack
    addi $sp,$sp,-4      # Adjust stack pointer
    sw $s0,0($sp)        # Save $s0
    addi $sp,$sp,-4      # Adjust stack pointer
    sw $s1,0($sp)        # Save $s1

    # Do the function math
    li $s0, 3
    mul $s1,$s0,$a0        # s1 = 3*$a0 (i.e. 3*a)
    addi $s1,$s1,5        # 3*a+5

    # Save the return value in $v0
    move $v0,$s1

    # Restore saved register values from stack in opposite order
    # This is POP'ing from stack
    lw $s1,0($sp)        # Restore $s1
    addi $sp,$sp,4        # Adjust stack pointer
    lw $s0,0($sp)        # Restore $s0
    addi $sp,$sp,4        # Adjust stack pointer

    # Return from function
    jr $ra                # Jump to addr stored in $ra

# -----
# Start .data segment (data!)
.data
x: .word 5
y: .word 0
msg1: .asciiz "y="
lf: .asciiz "\n"

```

Random Number Generator



In-Class Discussion